





# KANGAROO PRO JUNIOR


**How to install your monitor** - attaching your monitor to the Ergo Desktop mount, 5/32 allen wrench and M4 screws provided


- 

1. Front side of VESA plate  
Loosen button screw on left side of VESA mount and knob on right side 3 turns each
- 

2. Remove VESA mount and separate washers as shown, VESA mount fits between washers
- 


3. Remove the base from your monitor and lay it face down on a soft surface
- 

4. NOTE SLOT ORIENTATION  
Place VESA mount on the back of your monitor and line up the holes, NOTE the location of the slots in the VESA mount. Attach mount with 4 screws. Visually line up the mount with your monitor and tighten.
- 

5. (This may require 2 people) Pick up monitor and guide the slots of the VESA mount between the washers
- 

6. Tighten button screw (w/ allen wrench) and knob to secure your monitor in place. You are now ready to attach your cords and go!!!

## HOW TO USE THE KANGAROO PRO JUNIOR

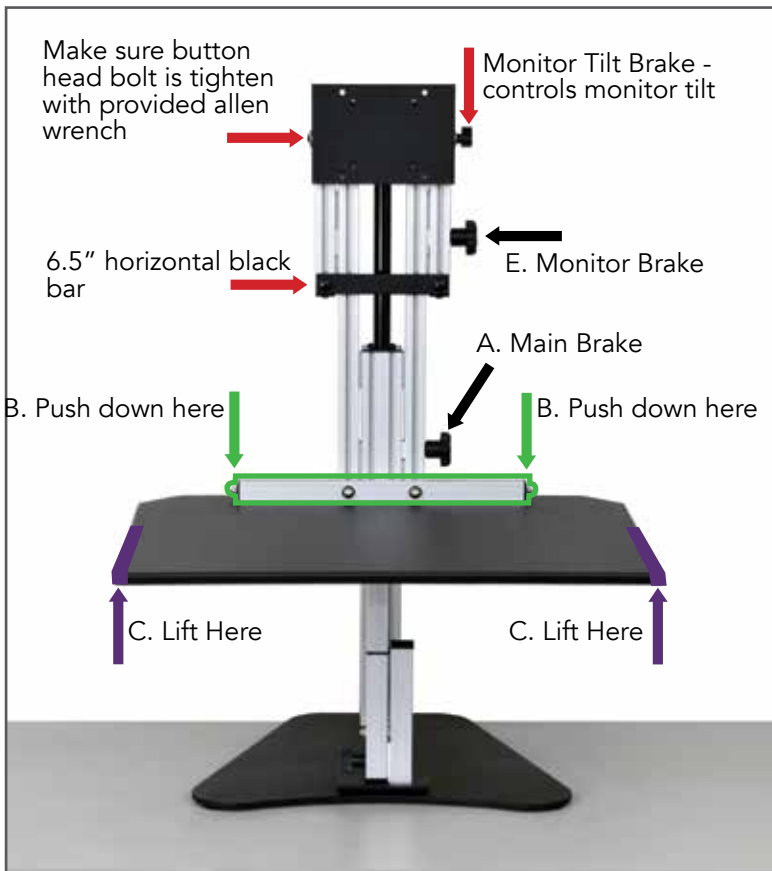

To raise the Pro Junior, loosen the main brake(A) and lift the main work surface on the sides(C & C). Once you have the work surface at the required height tighten the main brake.

To lower the Pro Junior, loosen the main brake(A) and lean into the unit using your upper body weight pushing down with both hands on the horizontal bar at the rear of the main work surface (B & B).

Raise and lower the monitor by loosening the monitor brake(E) and either lift up or push down on the monitor or 6.5" horizontal black bar. Once the monitor reaches your desired level, tighten the monitor brake.

A. Main Brake

B. Work Surface Rail

C. Main Work Surface

D. Horizontal Monitor Rail

E. Monitor Brake

## THE STABILIZATION LEG

Your adjustable height desk top unit comes with an adjustable leg that can be used to give you maximum stability when you are using "The Kangaroo" in the standing position.

Raise the Kangaroo work surface to your desired standing height and tighten the work surface brake.

Place the adjustable leg under the work surface and loosen the adjustable leg brake. Only loosen the brake by a turn or two, too much and the brake will disengage from the slot.

Extend the adjustable leg until it engages the bottom of the work surface and then tighten the adjustable leg brake.

The leg is shipped with the extension section installed to give you additional height adjustment. If this is too tall for your application, simply unscrew the extension selection.

**A** Extension selection

**B** Screws into here

**ALWAYS REMEMBER TO REMOVE THE STABILIZATION LEG BEFORE LOWERING YOUR WORK SURFACE**

