

THE KANGAROO JUNIOR




The Kangaroo Junior is designed to hold your laptop or LCD monitor on the monitor shelf and your keyboard and mouse on the main work surface. Your Kangaroo Junior is shipped in the down position with both the monitor shelf brake and the main brakes tightened.

The Kangaroo Junior has (2) springs that assist in raising your unit to the standing position and work best when your laptop or monitor and keyboard are in place. This reduces the amount of pressure needed to lower the unit.

Always push down with both hands on the horizontal rear rail when lowering the main work surface.

HOW TO USE THE KANGAROO JUNIOR

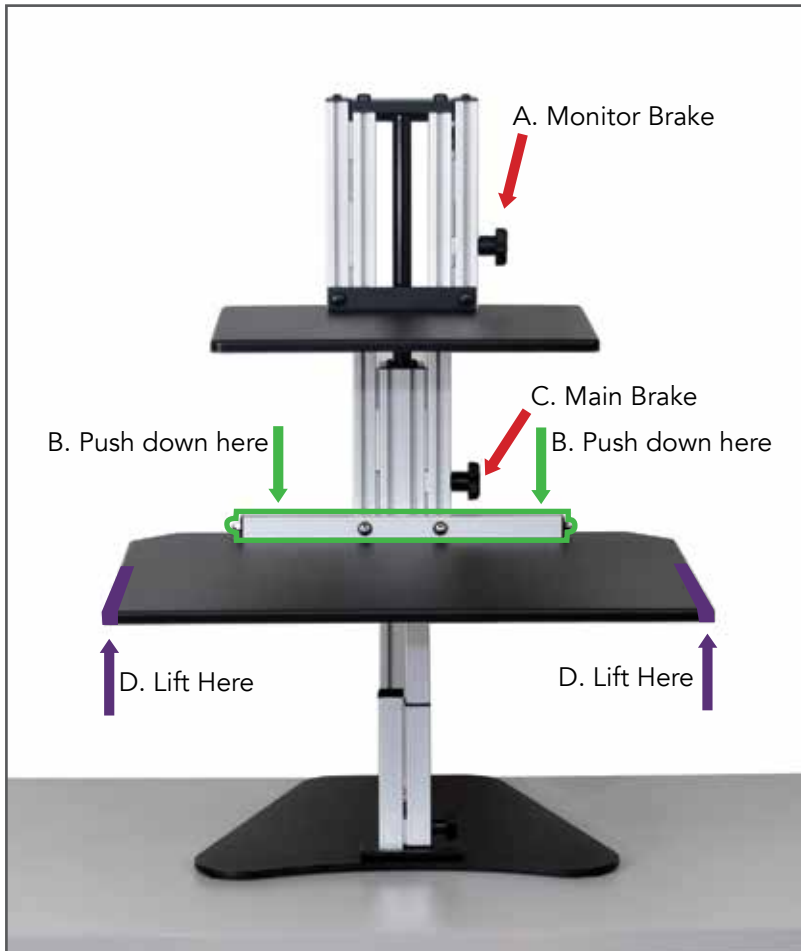

To raise the Kangaroo Junior, loosen the main brake(C) and lift the main work surface on the sides(D & D).

To raise the Monitor, loosen the monitor brake(A) and lift the monitor shelf.

To lower the Kangaroo Junior, loosen the main brake(C) and lean into the unit using your upper body weight pushing down with both hands on the horizontal bar at the rear of the main work surface (B & B).

To Lower the monitor shelf, loosen the monitor brake(A) and push down with one or two hands on the monitor shelf.

A. Monitor Brake

B. Work Surface Rail


C. Main Brake

D. Main Work Surface

HOW TO ADJUST YOUR JUNIOR TO SUPPORT LAPTOP OR MONITOR

If you have selected the Monitor/Laptop selection when ordering your Kangaroo Junior, the Junior's monitor shelf will be preset at the Monitor height, please follow the instructions below to change the monitor shelf to support a laptop.

1. Bring the unit into the standing position.
2. Tighten the monitor brake(A), and remove the monitor from the shelf.
3. Go to the back of the unit and **loosen the bolt attached to the top of the monitor spring by just 1/2 a turn.**
4. Loosen the monitor brake and lift the monitor shelf to the desired height.
5. Tighten the monitor brake, then tighten the bolt attached to the monitor spring.

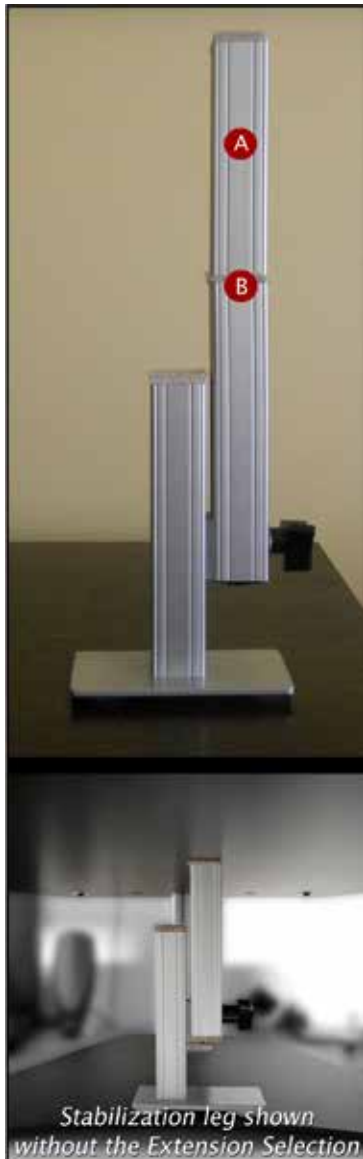

THE STABILIZATION LEG

Your adjustable height desk top unit comes with an adjustable leg that can be used to give you maximum stability when you are using "The Kangaroo" in the standing position.

Raise the Kangaroo work surface to your desired standing height and tighten the work surface brake.

Place the adjustable leg under the work surface and loosen the adjustable leg brake. Only loosen the brake by a turn or two, too much and the brake will disengage from the slot.

Extend the adjustable leg until it engages the bottom of the work surface and then tighten the adjustable leg brake.

The leg is shipped with the extension section installed to give you additional height adjustment. If this is too tall for your application, simply unscrew the extension selection.

A Extension selection

B Screws into here

ALWAYS REMEMBER TO REMOVE THE STABILIZATION LEG BEFORE LOWERING YOUR WORK SURFACE